


TORAYFAN[®] PC3

Application

- Confectionary
 - Snacks
 - Bakery
 - Food
- Industrial

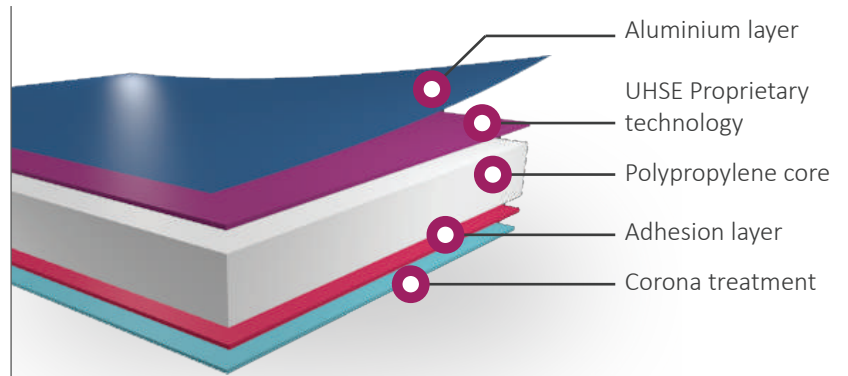

Torayfan[®] PC3

ULTRA HIGH BARRIER
METALLIZED BOPP

Benefits

- Guaranteed ultra high moisture barrier
- Guaranteed oxygen barrier
- Non craze metal surface
- Excellent bonding in extrusion and adhesive laminations

Typical Values *

Properties	Test Method	Unit	12,5 µm	15 µm
Nominal Yield		m ² /kg	87,6	73
Tensile Strength @ Break MD	ASTM D 882	daN/mm ²	15	15
Tensile Strength @ Break TD			30	30
Young's Modulus MD	ASTM D 882	daN/mm ²	220	220
Young's Modulus TD			400	400
Elongation @ Break MD	ASTM D 882	%	160	200
Elongation @ Break TD			50	50
Dimensional Stability MD	Internal Method	%	8	8
Dimensional Stability TD			5	4
COF (sealant to sealant)	ASTM D1894	static	0,3	0,3
		dynamic	0,3	0,3
Wetting Tension	ASTM D2578	dyne/cm	40	40
OTR, 50% HR, 23°C	ASTM D3985	cc/m ² /day	10	10
MVTR, 90% HR, 38°C	ASTM F1249	g/m ² /day	<0,1	<0,1

Regulation

Torayfan® PC3 complies with European applicable requirements for food contact applications. For Toray's certification concerning specific applications with each product, please refer to the 'Declaration of Compliance'.

Presentation of the rolls

Roll packaging: The rolls are suspended on standard paper core with internal diameter of 152.8mm. For all presentation, minimum roll width = 340mm and maximum roll width = 2450mm.

Returnable packaging: Wooden flanges, plastic flanges and pallets are returnable. The metallized side is identified on the labels.



Metallized side inside

Please contact us for...

- Any other presentation (width, length, core)
- Process for returnable packaging
- Any other information about typical values, measuring conditions, tolerances, deliveries...

* These values do not constitute binding specifications

Torayfan® is a registered trademark of Toray Film Europe SAS- TFE January 2018

DISCLAIMER: This leaflet is provided for informational purpose only and is not binding, nor can it constitute specifications to the buyer. The information contained in this document is based on numerous tests and trials we have carried out in our laboratories. Deviations from the results thus obtained can therefore be experienced depending on the actual conditions of use. This document does not provide any guarantee with regard to compliance of our product with the typical values indicated, nor does it provide any guarantee as the suitability of our products for any particular use.